


## LUMIPLUS ESSENTIAL MINI PROJECTOR FOR NICHE

Niche mounted. Compatible with Astralpool's Mini niches .



		76680	76680WW
A ↑ E	Color	White	Warm White
	Consumption	4 W (6 VA)	
	Luminous flux	315 lm	
	Temp. Color	5.700 K	3.000 K
		76682	
A ↑ G	Color	RGB	
	Consumption	4 W (7 VA)	
	Luminous flux	186 lm	
	Remote Control	Not included	
	Control	Can be controlled by push-button 32458, LumiPlus Range Extender 64633 + RC1100 remote controller 75773 or LumiPlus Connect controller 76290.	

VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	
	Chlorine: 2 mg/l Bromine: 5 mg/l
	Salt chlorinator (NaCl): 6 g/l
	Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm <sup>2</sup>
MATERIALS:	Polyamide
NICHES:	06967, 00369, 49828
DECORATIVE RINGS:	04582-0500CL090
	04582-0500CL129
	04582-0500CL144

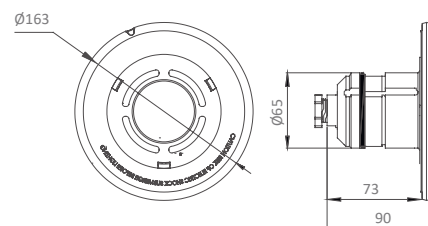

## PACKAGING AND PALLETIZATION

Volume/Single box (m <sup>3</sup> )	0,003
Weight/Single box (kg)	0,75
Units/Standard box	4
Volume/Standard box (m <sup>3</sup> )	0,026
Weight/Standard box (kg)	3,50
Units/Pallet	192
Volume/Pallet (m <sup>3</sup> )	2,30
Weight/Pallet (kg)	200

